

[Research]

Application of synthetic polymers as adsorbents for the removal of cadmium from aqueous solutions: Batch experimental studies

R. Shemshadi^{1*}, M. Arvand², A. A. Efendiev¹, N. A. Zeynalov¹

1- Kimya Problemləri İnstitutu, Azərbaycan Milli EA-mn, Azerbaijan Republic.

2- Dept. of Chemistry, Faculty of Science, University of Guilan, P.O. Box 1914, Rasht, Iran.

* Corresponding author's E-mail: shamshadi@gmail.com

(Received: Sept. 10-2011, Accepted: Feb. 15-2012)

ABSTRACT

In the present study seven synthetic polymers were used as adsorbents for the removal of Cd(II) from aqueous solution. The equilibrium studies were systematically carried out in a batch process, covering various process parameters that include agitation time, adsorbent dosage, and pH of the aqueous solution. The analyzing system was an atomic absorption spectrometer (Perkin-Analyst 100). It was observed in adsorption and desorption tests that synthetic polymers showed significant pH dependence, which affected the removal efficiency, robustly. Adsorption behavior was found to follow Freundlich and Langmuir isotherms. A regeneration study was also carried out.

Keywords: Cadmium, Adsorption, Synthetic polymers, Heavy metals, Wastewater treatment.

INTRODUCTION

The pollution of water and soil with metal cations has increased dramatically in the last 50 years as a consequence of the expedition of industrial activities. The well-established toxicity of metals in solution at sufficiently high concentrations affects humans, animals and vegetation (Abbasi *et al.* 1998). Due to the problems mentioned, attention has been focused on the various adsorbents, which have metal binding capacities and are able to remove unwanted heavy metals from contaminated water at low-costs (Pipšika *et al.* 2010; Kumar Bajpai *et al.* 2009 and Saberyan *et al.* 2010). Because of their low cost and local availability, natural materials such as chitosan, zeolites, clays, or certain waste products from industrial operations such as fly ash, coal and oxides are classified as low-cost adsorbents (Turner *et al.* 1998; Naseem & Tahir 2001; Pusch 1992 and Khan *et al.* 1995). A suitable adsorbent for adsorption processes of pollutants should meet several requirements: (i) efficient for removal of a wide variety of target pollutants; (ii) high capacity and rate of adsorption; (iii) important selectivity for different concentrations; (iv) granular type with

good surface area; (v) high physical strength; (vi) able to be regenerated if required; (vii) tolerant for a wide range of wastewater parameters; and (viii) low-cost. The natural sorbents (polysaccharides) are low-cost materials obtained from natural raw resources. These materials are versatile and allow the sorbents to be used under different forms and can be regenerated easily. But there are some limitations in adsorption by natural adsorbent (Chandra & Rustgi 1998; Crini 2003; Cao *et al.* 2001; Kurita 2001; Guibal *et al.* 2006; Ajmal *et al.* 1998 and Lee & Davis 2001). The adsorption properties of the adsorbents depend on the different sources of raw materials in spite of the extreme variability of industrial waste water must be taken into account in the design of any polysaccharide system. Each type of pollutant may need its own particular polysaccharide. The choice of adsorbent depends on the nature of pollutant. On the other hand, the efficiency of adsorption depends on physicochemical characteristics such as porosity, surface specific area and particle size of sorbent. Another problem with polysaccharide based materials is their poor physicochemical characteristics in

particular porosity (Mcafee *et al.* 2001; Delval *et al.* 2005 and Mi *et al.* 2002).

The use of synthetic adsorbent polymers in wastewater treatment has been investigated by several authors (Boenig *et al.* 1980 and Ferraro 1987.) These adsorbents composed of synthetic polymer and ligand, wherein the metal ions are bound to the polymer ligand by a coordinate bond. A ligand contains anchoring sites like nitrogen, oxygen or sulfur obtained either by polymerization of monomer possessing the coordinating site or by a chemical reaction between a polymer and a low molecular weight compound having coordinating ability (Kantipuly *et al.* 1990; Arsalani *et al.* 2009 and Kaliyappan & Kannan 2000). During the last few years, attempts were made to improve these adsorbent polymers which originally were developed on the basis of ion exchange resins (Dedek *et al.* 1992). On the other hand, the use of new technologies allowed the production of highly porous polymers with a specific surface of 800–1500 m²g⁻¹ which is similar to the surface of activated carbon (Schröder & Radeke 1995).

The main objective of this work is to develop and apply seven synthetic polymers as potential sorbents for removal and determination of Cd(II) in polluted solutions. The purpose also includes the investigation of the effects of pH, equilibrium time, and other parameters on the removal efficiency. Adsorption isotherms were also investigated.

MATERIALS and METHODS

Start materials were obtained as follows: poly(vinyl pyridine) (PVP), N,N'-methylenebis (acrylamide) (MBAAm-N,N'), poly(acrylamide) (PAAm), benzyl chloride and gum arabic all from Merck or Fluka. The following inorganic materials were used: Cd(NO₃)₂ (Merck), HCl 37% and NaOH 99.5% (Fluka). All solutions for experiments were prepared with distilled water. The used adsorbents obtained by blending of the polymers with given ratios are as follows: P1 (PVP + 10% MBAAm-N,N'), P2 (PVP + PAAm (1:1) + 10% MBAAm-N,N'), P3 (PAAm + 10% MBAAm-N,N'), P4 (PAAm + gum arabic (1:5)), P5 (30% PVP + 30% benzyl chloride + 30% MBAAm-N,N'), P6 (30% PVP + 30%

benzyl chloride + 20% MBAAm-N,N'), P7 (30% PVP + 30% benzyl chloride + 10% MBAAm-N,N').

Adsorption experiments

Adsorption experiments were conducted at a constant temperature (298 K) on a three dimensional shaker during certain time. The solid-liquid system consisted of 50 ml aqueous solution containing Cd(II) (50 ppm) and different dose of adsorbents. After sufficient contact time, the solution was filtered and filtrate was analyzed by atomic absorption spectrometer. Standard solutions containing 1, 20, 50, 100, and 500 ppm Cd(II) were used for calibration.

Apparatus

A Perkin atomic absorption spectrometer (Perkin-Analyst 100) equipped with a deuterium-arc lamp background corrector was used for absorbance measurements at appropriate wavelengths. The operating conditions were those recommended by the manufacturer, unless specified otherwise. The sample and the acetylene flow rates and the burner height were adjusted in order to obtain the maximum absorbance signal.

RESULTS and DISCUSSION

Effect of pH

pH is an important parameter for adsorption of Cd(II) from aqueous solution because it affects the solubility of the metal ions, concentration of the counter ions on the functional groups of the adsorbent and the degree of ionization of the adsorbent during reaction. To examine the effect of pH on the Cd(II) removal efficiency, the pH of initial solution was adjusted to the corresponding pH value (1.0 – 10.0) using 0.1 M HCl or 0.1 M NaOH. As shown in Fig. 1, the uptake of Cd(II) depends on pH, where optimum metal removal efficiency occurs at pH 10 for all studied polymers. As can be seen from Fig. 1, almost no adsorption of cadmium ions took place on synthetic polymers at pH < 2, probably due to the significant competitive adsorption of hydrogen ions. The adsorption studies at pH > 10 were not conducted because of the precipitation of Cd(OH)₂ from the solution.

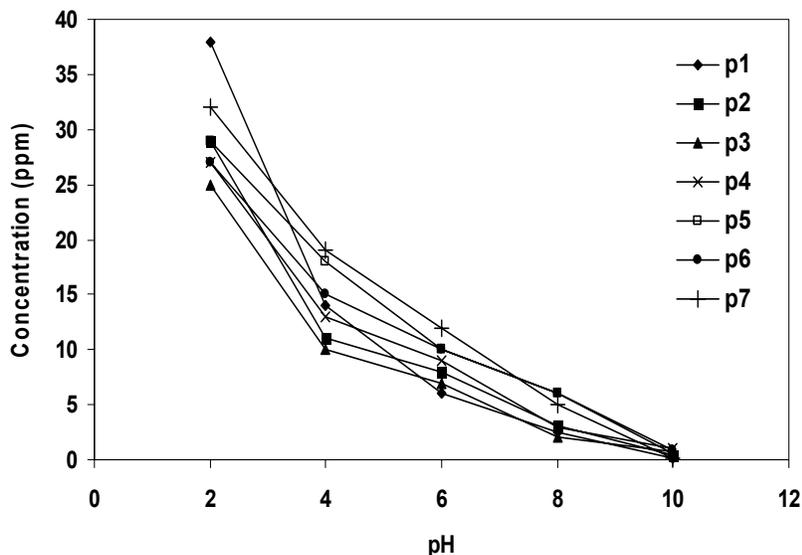


Fig 1. Effect of pH on the Cd(II) removal efficiency using P1-P7 synthetic polymers.

Effect of adsorbent dose

The dependence of Cd(II) sorption on adsorbent dosage was studied by varying the amount of polymers from 0.1 to 0.7 g, while keeping other parameters (pH and contact time) constant. Fig. 2 presents the Cd(II) removal efficiency for seven types of adsorbents used. Form Fig. 2, it can be observed that removal efficiency of the polymers improved with increasing *adsorbent dosage* from 0.1 g to 0.4 g. This

was expected due to the fact that the higher dose of adsorbents in the solution, the greater availability of exchangeable sites. This also suggests that after a certain dose of adsorbent (0.2 g for P1, 0.3 g for P2, P3, P5, P6, P7 and 0.4 g for P4), the maximum adsorption sets in and hence the amount of Cd(II) bound to the adsorbent and the amount of Cd(II) in solution remains constant even with further addition of the dose of adsorbent.

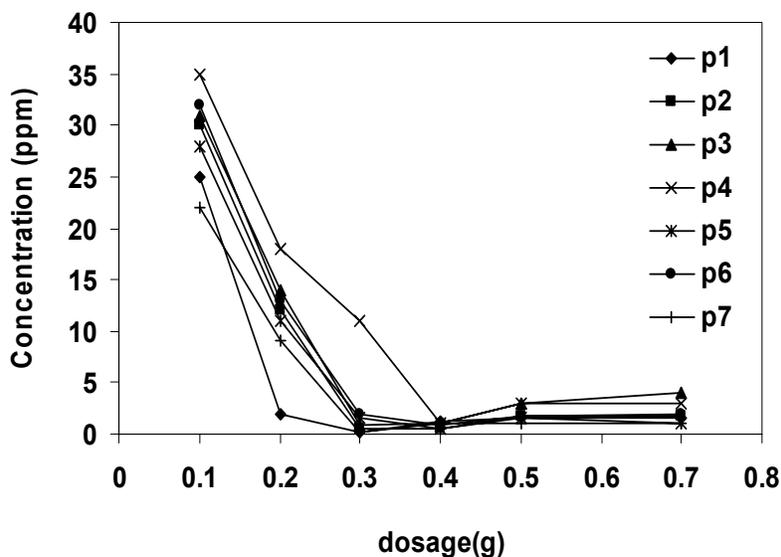


Fig 2. The effect of sorbent dosage on Cd(II) removal efficiency using P1-P7 synthetic polymers.

Effect of agitation time

Results (Fig. 3) indicate that removal efficiency increased with an increase in agitation time. Other parameters such as dose of adsorbent, pH of solution was kept optimum, while temperature was kept at 25 °C. Optimum agitation time for P1, P7 and P2-P6 was found to be 30, 45 and 60 min, respectively. Greater availability of

functional groups on the surface of polymers, which is required for interaction polymer and Cd(II), significantly improved the binding capacity and the process proceeded rapidly. This result is important, as equilibrium time is one of the important parameters for an economical wastewater treatment system.

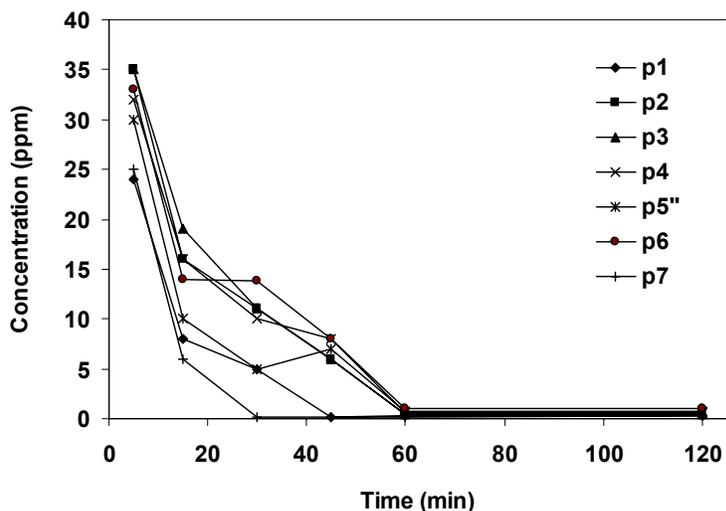


Fig 3. Effect of agitation time on Cd(II) removal efficiency using P1-P7 synthetic polymers.

Adsorption isotherms

The empirical Freundlich relationship does not indicate a finite uptake capacity of the adsorbent. This relationship can be reasonably applied to the low or intermediate concentration ranges. Freundlich isotherm equation is given by:

$$q_e = k_f C_e^{1/n} \quad (1)$$

and is linearized as:

$$\log q_e = \log k_f + 1/n \log C_e \quad (2)$$

Where q_e is the equilibrium adsorption

capacity of Cd(II) on the adsorbent (mg/g), C_e the equilibrium Cd(II) concentration in solution (mg/L), k_f Freundlich constant (L/mg), and n is heterogeneity factor. The present data in Table 1 shows relatively good linearity for Freundlich relationship. Linearity of the relationship indicates strong binding of Cd(II) to the adsorbents. The values of k_f and n were determined from the slope and intercept of the linear plot of $\log q_e$ versus $\log C_e$.

Table 1. Freundlich linear isotherms for the adsorption of Cd(II) using P1-P7 synthetic polymers.

Adsorbent type	Equation	Regression coefficient
P1	$\log q_e = 0.5789 \log C_e - 0.7789$	$R^2 = 0.9963$
P2	$\log q_e = 0.5125 \log C_e - 0.7568$	$R^2 = 0.9879$
P3	$\log q_e = 0.6125 \log C_e - 0.8954$	$R^2 = 0.9911$
P4	$\log q_e = 0.6042 \log C_e - 0.7986$	$R^2 = 0.9821$
P5	$\log q_e = 0.5897 \log C_e - 0.7998$	$R^2 = 0.9941$
P6	$\log q_e = 0.5612 \log C_e - 0.8142$	$R^2 = 0.9861$
P7	$\log q_e = 0.5588 \log C_e - 0.7889$	$R^2 = 0.9819$

Langmuir isotherm is the most widely used two-parameter equation. The relationship is of the form:

$$q_e/q_m = bC_e / (1+bC_e) \quad (3)$$

or

$$C_e/q_e = C_e/q_m + 1/bq_m \quad (4)$$

q_m the maximum capacity of adsorbent (mg/g), and b is the Langmuir adsorption constant (L/mg). Langmuir isotherm for the present data is presented in Table 2. q_m and b are calculated from the slope ($1/q_m$) and intercept ($1/bq_m$) (Table 3). The isotherm lines have good linearity.

Table 2. Langmuir linear isotherms for the adsorption of Cd(II) using P1-P7 synthetic polymers.

Adsorbent type	Equation	Regression coefficient
P1	$C_e/q_e = 0.0316 C_e + 4.7846$	$R^2 = 0.9929$
P2	$C_e/q_e = 0.0409 C_e + 4.7623$	$R^2 = 0.9984$
P3	$C_e/q_e = 0.0412 C_e + 4.7459$	$R^2 = 0.9899$
P4	$C_e/q_e = 0.0369 C_e + 4.8152$	$R^2 = 0.9905$
P5	$C_e/q_e = 0.0394 C_e + 4.8596$	$R^2 = 0.9990$
P6	$C_e/q_e = 0.0514 C_e + 4.7955$	$R^2 = 0.9878$
P7	$C_e/q_e = 0.0387 C_e + 4.6946$	$R^2 = 0.9869$

Table 3. Langmuir and Freundlich constants for the uptake of cadmium using P1-P7 synthetic polymers.

Adsorbent type	Freundlich constants		Langmuir constants	
	n	k_f	q_m	b
P1	1.73	0.17	31.6	0.007
P2	1.95	0.17	24.4	0.008
P3	1.63	0.13	24.3	0.009
P4	1.66	0.16	27.1	0.008
P5	1.70	0.16	25.4	0.008
P6	1.78	0.15	19.4	0.011
P7	1.79	0.16	25.8	0.008

Desorption studies

For potential practical applications, the regeneration and reuse of an adsorbent are important. From the pH study, it has been found that the adsorption of cadmium ions on all polymers tested at $pH \leq 2.0$ was negligible. This suggested that desorption of cadmium ions from these polymers was possible around pH 2.0. Therefore, HCl solutions of different pH (2.5, 2.0 and 1.5) were used to examine the desorption study. It was found that the desorption percentages were 79, 91, and 93% for P1 adsorbent in the HCl solutions of pH 2.5,

2.0, and 1.5, respectively. The higher desorption efficiency at lower pH value could be referred to the sufficiently high hydrogen ion concentration, which led to the strong competitive adsorption.

CONCLUSION

Seven synthetic polymers were used for removal of cadmium ions from aqueous solutions. Based on the results, the P1 polymer was found as the best sorbent for adsorption of Cd(II) due to higher q_m and lower amount of adsorbent (0.2 g). All polymeric sorbents showed significant pH

dependence, which had a considerable effect on the cadmium removal. According to the collected results, the P1 polymer exhibited high performance as an adsorbent for removal of Cd(II) from aqueous solutions. It has been composed of poly(vinyl pyridine) and N,N'-methylenebis(acrylamide). Our findings showed that this sorbent has more affinity for cadmium than others. Adsorption of Cd(II) by P1-P7 are dependent on contact time, pH solution and dosage of adsorbent. The adsorption data fit in both Freundlich and Langmuir isotherms. In addition, acid solutions at $\text{pH} \leq 2$ was suitable for desorption of cadmium ions and the reusability of synthetic polymers were good.

REFERENCES

- Abbasi, S.A. Abbasi, N. and Soni, R.(1998) Heavy Metals in the Environment. Mittal. New Delhi. 71-73.
- Ajmal, M. Khan, A.H. Ahmad, S. and Ahmad, A.(1998) Role of sawdust in the removal of copper(II) from industrial wastes. *Water Res.* 32, 3085-3091.
- Arsalani, N. Rakh, R. Ghasemi, E. and Entezami, A.A.(2009) Removal of Ni(II) from synthetic solutions using new amine-containing resins based on polyacrylonitrile. *Iran. Polym. J.* 18, 623-632.
- Boenig, P.H. Beckmann, D.D. and Snoeyink, V.L.(1980) *Activated carbon versus resin* adsorption of humic substances. *J. Am. Water Works Assoc.* 72, 54-59.
- Cao, Z.Y. Ge, H.C. and Lai, S.L.(2001) Studies on synthesis and adsorption properties of chitosan cross-linked by glutaraldehyde and Cu(II) as template under microwave irradiation. *Eur. Polym. J.* 37, 2141-2143.
- Chandra, R. and Rustgi, R.(1998) Biodegradable polymers. *Prog. Polym. Sci.* 23, 1273-1335.
- Crini, G.(2003) Studies of adsorption of dyes on beta-cyclodextrin polymer. *Bioresour. Technol.* 90, 193-198.
- Dedek, W. Weil, L. and Feistel, L.(1992) Wofatit-adsorber polymere für die organische Spuren analytik. *Vom. Wasser.* 78, 155-164.
- Delval, F. Crini, G. Bertini, S. Filiatre, C. and Torri, G.(2005) Preparation, characterization and sorption properties of crosslinked starch-based exchangers. *Carbohydr. Polym.* 60, 67-75.
- Ferraro, J.F.(1987) Polymerische adsorber. *Technische Mitteilungen* 80, 334-338.
- Guibal, E. Van Vooren, M. Dempsey, B.A. and Roussy, J.(2006) A review of the use of chitosan for the removal of particulate and dissolved contaminants. *Separation Science and Technology*, 41: 2487-2514.
- Kaliyappan, T. and Kannan, P.(2000) Co-ordination polymers. *Prog. Polym. Sci.* 25, 343-370.
- Kantipuly, C. Katragadda, S. Chow, A. and Gesser, H.D.(1990) Chelating polymers and related supports for separation and preconcentration of trace metals. *Talanta* 37, 491-517.
- Khan, S.A. Rehman, R. and Khan, M.A.(1995) Adsorption of chromium(III), chromium(VI) and silver(I) on bentonite. *Waste Manage.* 15, 271-282.
- Kumar Bajpai, S. Kumar Armo, M. and Namdeo, M.(2009) Removal of Cu(II) from aqueous solutions using magnetite exchanger resin. *Acta Chim. Slov.* 56, 254-261.
- Kurita, K.(2001) Controlled functionalization of the polysaccharide chitin. *Prog. Polym. Sci.* 26, 1921-1971.
- Lee, S.M. and Davis, A.P.(2001) Removal of Cu(II) and Cd(II) from aqueous solution by seafood processing waste sludge. *Water Res.* 35, 534-540.
- Mcafee, B.J. Gould, W.D. Nadeau, J.C. and Da Costa, A.C.A.(2001) Biosorption of metal ions on chitosan, chitin, and biomass of rhizopus oryzae. *Sep. Sci. Technol.* 36, 3207-3222.
- Mi, F.L. Shyu, S.S. Chen, C.T. and Lai J.Y.(2002) Adsorption of indomethacin onto chemically modified chitosan beads. *Polymer* 43, 757-765.
- Naseem, R. and Tahir, S.S.(2001) Removal of Pb(II) from Aqueous/Acidic Solutions by using Bentonite as an Adsorbent. *Water Res.* 35, 3982-3986.
- Pipšika, M. Horník, M. Remenárová, L. Augustin, J. and Lesný, J.(2010) Biosorption of cadmium, cobalt and zinc by moss *rhytidiadelphus squarrosus* in the single and binary component systems. *Acta Chim. Slov.* 57, 163-172.
- Pusch, R.(1992) Use of bentonite for isolation of radioactive waste products. *Clays Clay Miner.* 37, 353-361.
- Saberyan, K. Zolfonoun, E. Shamsipur, M.

- and Salavati-Niasari, M.(2010) Amberlite XAD-4 impregnated with a new pentadentate Schiff base: a chelating collector for separation and preconcentration of trace amounts of gallium(III) and indium(III). *Acta Chim. Slov.* 57, 222-229.
- Schröder, H. and Radeke, K.H.(1995) Porenstruktur untersuchungen von adsorber polymeren zum einsatz in der abwasserreinigung. *Chem. Ing. Tech.* 67, 93-96.
- Turner, D.R. Pablan, R.T. Turner, D.R. Pablan, R.T. and Bertetti, F.P.(1998) Neptunium(V) sorption on montmorillonite: An experimental and surface complexation modeling study. *Clays Clay Miner.* 46, 256-269.

کاربرد پلیمرهای سنتزی به عنوان جاذب برای حذف کادمیم از محلول‌های آبی: مطالعات آزمایشگاهی ناپیوسته

ر. شمشادی، م. آرون، ا.ا. افندیف و ن.ا. زینالف

چکیده

در این مطالعه هفت پلیمر سنتزی به عنوان جاذب برای حذف $Cd(II)$ از محلول آبی استفاده شدند. بررسی‌های تعادلی به شیوه سیستماتیک و در یک فرآیند ناپیوسته انجام گردید بطوریکه عوامل مختلفی از جمله زمان هم‌زدن، میزان جاذب و محلول آبی را در بر می‌گرفت. سیستم آنالیزکننده یک دستگاه اسپکترومتر جذب اتمی (Perkin-100 Analyst) بود. در بررسی‌های جذب و واجذب مشاهده شد که پلیمرهای سنتزی وابستگی شدیدی به pH داشتند که بر روی کارایی حذف شدیداً موثر بود. رفتار جذبی از همدماهای فروندلیش و لانگمویر پیروی می‌نمود. مطالعاتی در زمینه بازیابی جاذب نیز انجام شد.